

N-and P-Channel 20 V (D-S) MOSFET

PRODUCT SUMMARY

| | N-CH | P-CH |
|-------------------------------|--------|--------|
| B_{VDSS} | 20V | -20V |
| R_{DS(on)MAX.} | 0.030Ω | 0.070Ω |
| I_D | 4A | -3.5A |

FEATURES



- TrenchFET Power MOSFETs
- 100 % R_G Tested

APPLICATIONS


- Load Switch for Portable Devices
- DC/DC Converters
- Drivers: Motor, Solenoid, Relay



RoHS
COMPLIANT
HALOGEN
FREE

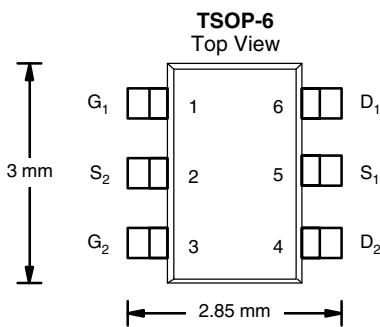

N-Channel MOSFET



P-Channel MOSFET

Absolute Maximum Ratings (T_A = 25 °C, unless otherwise noted)

| Parameter | Symbol | N-Channel | P-Channel | Unit | |
|--|--|-----------------------|-----------|------|---|
| Drain-Source Voltage | V_{DS} | 20 | -20 | V | |
| Gate-Source Voltage | V_{GS} | ±12 | ±12 | V | |
| Continuous Drain Current@10V | I_D | T _A = 25°C | 5.5 | -3.5 | A |
| | | T _A = 70°C | 4.5 | -2.4 | |
| Pulsed Drain Current | I_{DM} | 15 | -10 | A | |
| Total Power Dissipation | P_D | 1.4 | 1.4 | W | |
| Operating Junction and Storage Temperature Range | T_J , T_{STG} | -55 to 150 | | °C | |

Thermal Characteristics

| Parameter | Symbol | Typmbol | Maximum | Unit |
|---|------------------------|--------------|---------|--------|
| Thermal resistance, junction-to-ambient | R_{θJA} | t ≤ 10 s | 70 | °C / W |
| | | Steady State | 100 | |
| Thermal resistance, junction-to-case | R_{θJC} | 63 | 80 | |

Electrical Characteristics $T_J = 25^\circ\text{C}$, unless otherwise noted


| Parameter | Symbol | Test Conditions | Min. | Typ. | Max. | Unit | |
|----------------------------------|---------------|---|------|------|-------|-------|----------|
| Static Characteristics | | | | | | | |
| Drain-Source Breakdown Voltage | $V_{(BR)DSS}$ | $V_{GS} = 0V, I_D = 250 \mu A$ | N-CH | 20 | - | - | V |
| | | $V_{GS} = 0V, I_D = -250 \mu A$ | P-CH | -20 | - | - | |
| Gate-body Leakage current | I_{GSS} | $V_{DS} = 0V, V_{GS} = \pm 12V$ | N-CH | - | - | 100 | nA |
| | | | P-CH | - | - | -100 | |
| Zero Gate Voltage Drain Current | I_{DSS} | $V_{DS} = 20V, V_{GS} = 0V$ | N-CH | - | - | 1 | μA |
| | | $V_{DS} = -20V, V_{GS} = 0V$ | P-CH | - | - | -1 | |
| Gate-Threshold Voltage | $V_{GS(th)}$ | $V_{DS} = V_{GS}, I_D = 250 \mu A$ | N-CH | 0.5 | | 1.2 | V |
| | | $V_{DS} = V_{GS}, I_D = -250 \mu A$ | P-CH | -0.5 | | -1.2 | |
| Drain-Source On-Resistance | $R_{DS(on)}$ | $V_{GS} = 4.5V, I_D = 4A$ | N-CH | - | 0.022 | 0.030 | Ω |
| | | $V_{GS} = -4.5V, I_D = -3.5A$ | P-CH | - | 0.055 | 0.070 | |
| | | $V_{GS} = 2.5V, I_D = 3A$ | N-CH | - | 0.032 | 0.045 | |
| | | $V_{GS} = -2.5V, I_D = -3A$ | P-CH | - | 0.070 | 0.100 | |
| Dynamic Characteristics | | | | | | | |
| Input Capacitance | C_{iss} | N-Channel $V_{DS} = 10V, V_{GS} = 0V, f = 1MHz$ | N-CH | - | 396 | - | pF |
| | | | P-CH | - | 522 | - | |
| Output Capacitance | C_{oss} | P-Channel $V_{DS} = -10V, V_{GS} = 0V, f = 1MHz$ | N-CH | - | 54 | - | |
| | | | P-CH | - | 55 | - | |
| Reverse Transfer Capacitance | C_{rss} | | N-CH | - | 40 | - | |
| | | | P-CH | - | 40 | - | |
| Switching Characteristics | | | | | | | |
| Total Gate Charge | Q_g | N-Channel $V_{DS} = 10V, V_{GS} = 4.5V, I_D = 2A$ | N-CH | - | 5.6 | - | nC |
| | | | P-CH | - | 7 | - | |
| Gate-Source Charge | Q_{gs} | P-Channel $V_{DS} = -10V, V_{GS} = -4.5V, I_D = -3A$ | N-CH | - | 0.8 | - | |
| | | | P-CH | - | 1 | - | |
| Gate-Drain Charge | Q_{gd} | | N-CH | - | 1 | - | |
| | | | P-CH | - | 1.8 | - | |
| Turn-On Delay Time | $t_{d(on)}$ | N-Channel $V_{DD} = 10, I_D \cong 4A, V_{GEN} = 4.5V, R_G = 3\Omega$ | N-CH | - | 14 | - | nS |
| | | | P-CH | - | 10 | - | |
| Rise Time | t_r | P-Channel $V_{DD} = -15V, I_D \cong -3A, V_{GEN} = -4.5V, R_G = 2.5\Omega$ | N-CH | - | 10 | - | |
| | | | P-CH | - | 4 | - | |
| Turn-Off Delay Time | $t_{d(off)}$ | | N-CH | - | 30 | - | |
| | | | P-CH | - | 34 | - | |
| Fall Time | t_f | | N-CH | - | 7 | - | |
| | | | P-CH | - | 5 | - | |

| Drain-Source Body Diode Characteristics | | | | | | | |
|---|-----------------|--|------|---|---|-------|---|
| Diode Forward Voltage | V _{SD} | I _s = 1 A , V _{GS} = 0 V | N-CH | - | - | 1.2 | V |
| | | I _s = - 1 A , V _{GS} = 0 V | P-CH | - | - | -1.2 | |
| Continuous Source Current | I _s | T _J = 25°C | N-CH | - | - | 1.05 | A |
| | | | P-CH | - | - | -1.05 | |


Notes:

- Surface mounted on 1" x 1" FR4 board.
- Pulse width limited by maximum junction temperature.
- Pulse test: Pulse width $\leq 300 \mu\text{s}$, duty cycle $\leq 2 \%$.
- Guaranteed by design, not subject to production testing.


N-CHANNEL TYPICAL CHARACTERISTICS (25 °C, unless otherwise noted)

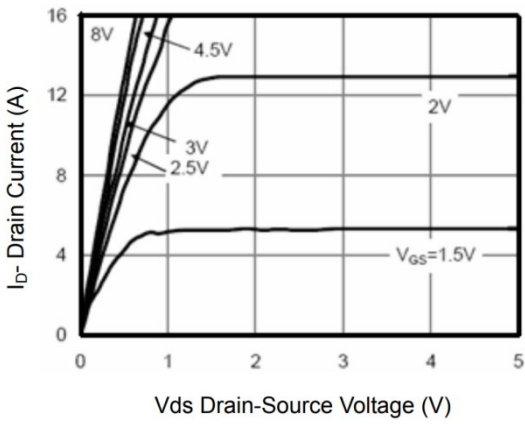


Output Characteristic

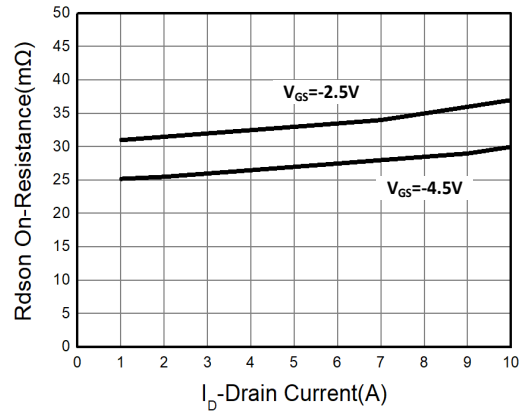


On-Resistance vs. Drain Current

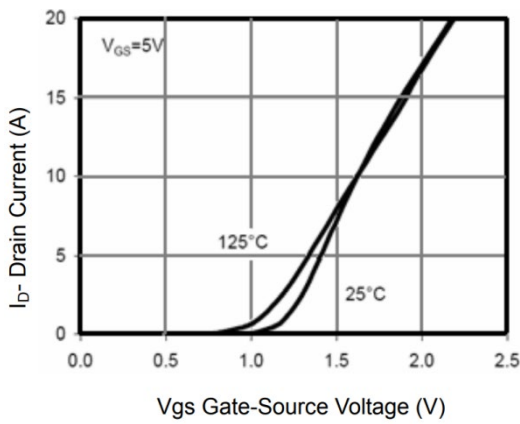


Transfer Characteristic

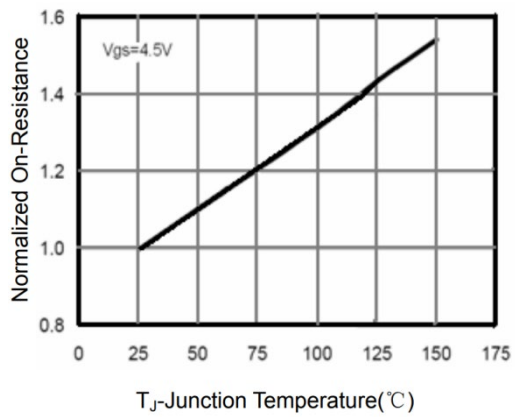

On-Resistance vs. Junction Temperature

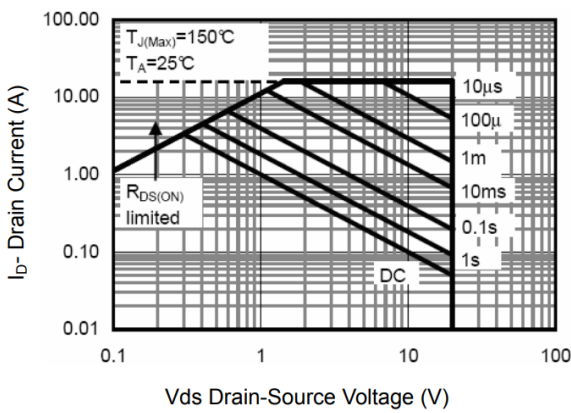


Safe Operation Area

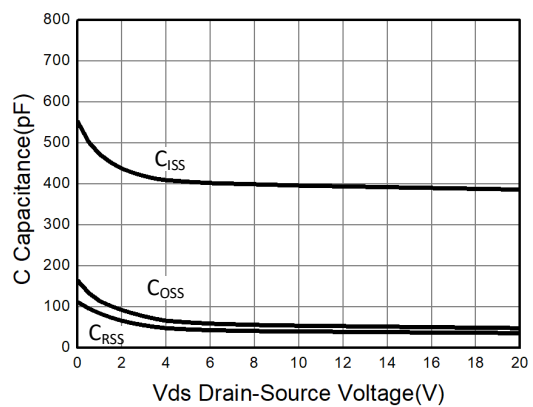


Capacitance Characteristic

N-CHANNEL TYPICAL CHARACTERISTICS (25 °C, unless otherwise noted)

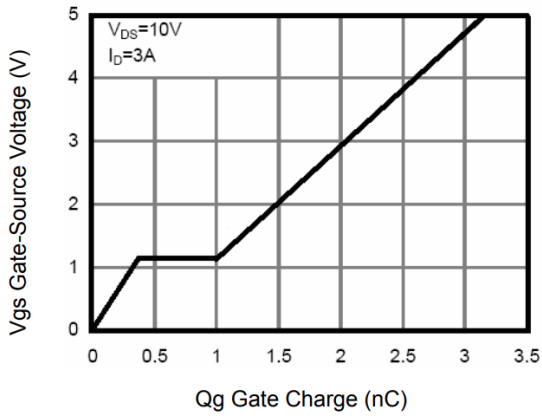


Gate-Charge Characteristic

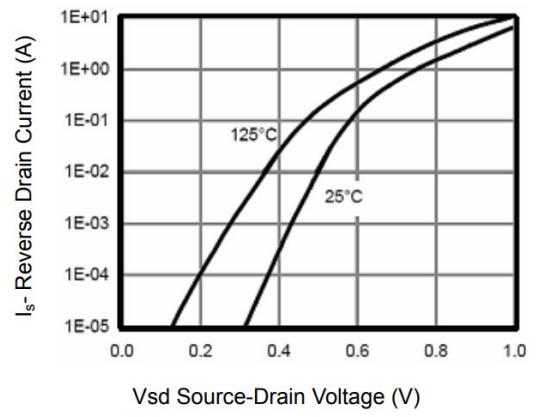


Body Diode Characteristic


P-CHANNEL TYPICAL CHARACTERISTICS (25 °C, unless otherwise noted)

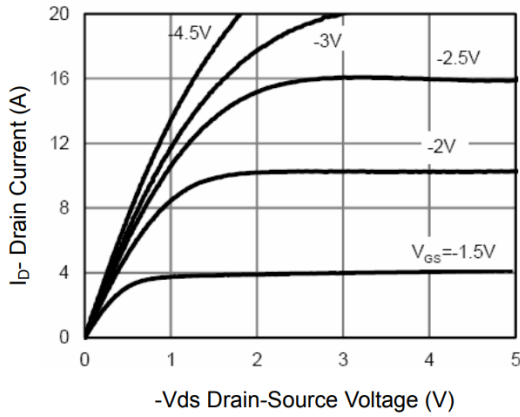


Output Characteristic

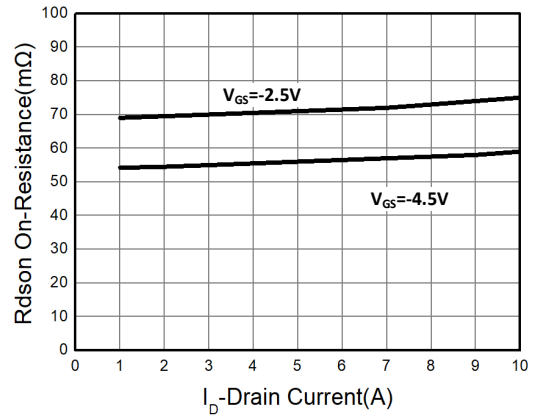


On-Resistance vs. Drain Current

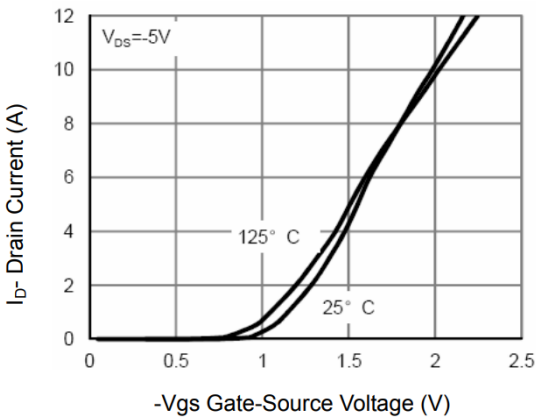


Transfer Characteristic

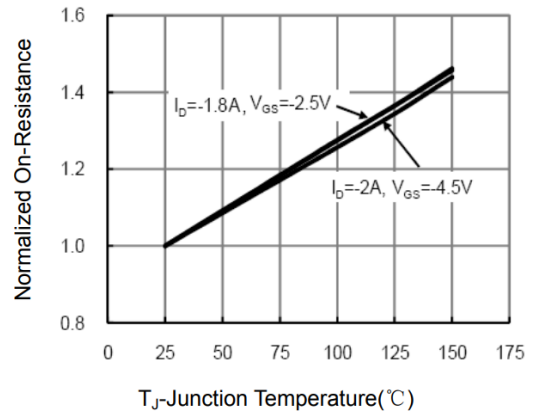

On-Resistance vs. Junction Temperature

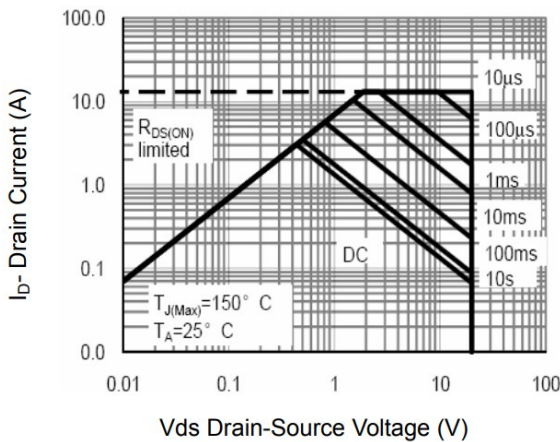


Safe Operation Area

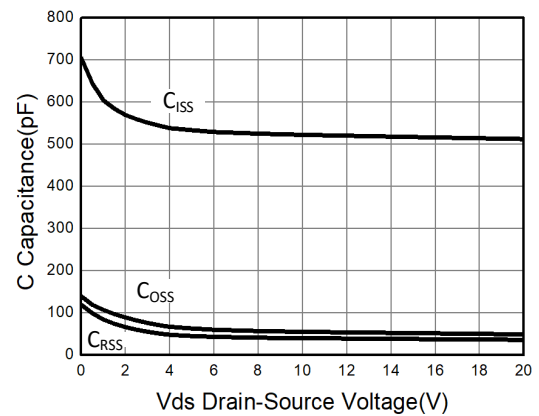


Capacitance Characteristic

P-CHANNEL TYPICAL CHARACTERISTICS (25 °C, unless otherwise noted)



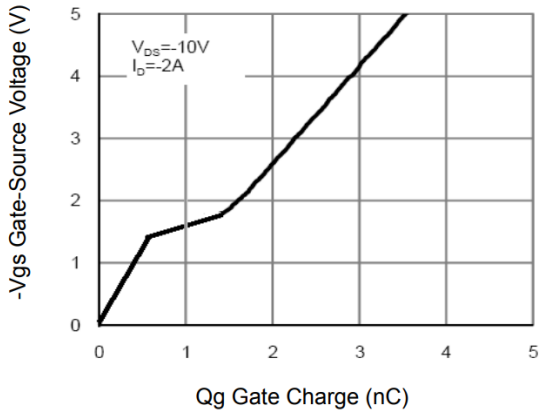


Gate-Charge Characteristic

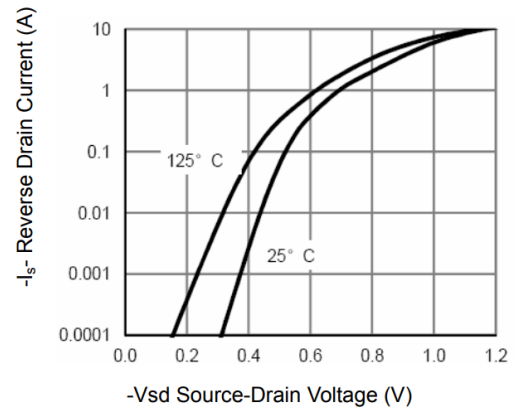


Body Diode Characteristic

TSOP-6 _ PACKGE OUTLIN

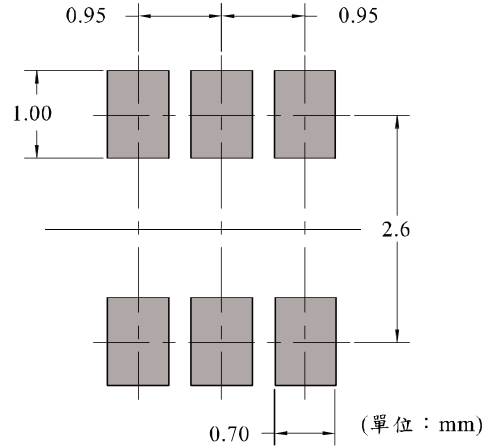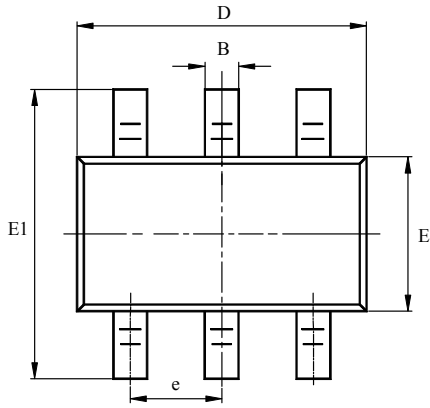

Land Pattern Recommendation

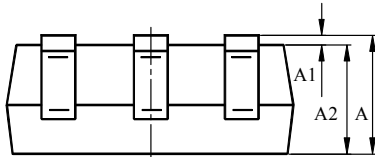

| SYMBOLS | MILLIMETERS | | INCHES | |
|---------|-------------|-------|-----------|-------|
| | MIN | MAX | MIN | MAX |
| A | 0.800 | 1.250 | 0.031 | 0.049 |
| A1 | 0 | 0.130 | 0 | 0.005 |
| A2 | 0.700 | 1.200 | 0.028 | 0.047 |
| B | 0.300 | 0.500 | 0.012 | 0.020 |
| C | 0.09 | 0.200 | 0.004 | 0.008 |
| D | 2.80 | 3.100 | 0.110 | 0.122 |
| E | 1.500 | 1.70 | 0.059 | 0.067 |
| E1 | 2.50 | 3.100 | 0.098 | 0.122 |
| e | 0.950 TYP | | 0.037 TYP | |
| L | 0.35 | 0.8 | 0.012 | 0.031 |
| L1 | 0.30 | 0.55 | 0.012 | 0.022 |

Product Specification Statement

All products due to improve reliability, function or for other reasons, product specifications and data are subject to change without notice.

The product specification aims to provide users with a reference regarding various product parameters, performance, and usage. It presents certain aspects of the product's performance in graphical form and is intended solely for users to select product and make product comparisons, enabling users to better understand and evaluate the characteristics and advantages of the product. It does not constitute any commitment, warranty, or guarantee.

The product parameters described in the product specification are numerical values, characteristics, and functions obtained through actual testing or theoretical calculations of the product in an independent or ideal state. Due to the complexity of product applications and variations in test conditions and equipment, there may be slight fluctuations in parameter test values. SAILFERO shall not guarantee that the actual performance of the product when installed in the customer's system or equipment will be entirely consistent with the product specification, especially concerning dynamic parameters. It is recommended that users consult with professionals for product selection and system design. Users should also thoroughly validate and assess whether the actual parameters and performance when installed in their respective systems or equipment meet their requirements or expectations. Additionally, users should exercise caution in verifying product compatibility issues, and SAILFERO assumes no responsibility for the application of the product.

SAILFERO strives to provide accurate and up-to-date information to the best of our ability. However, due to technical, human, or other reasons, SAILFERO cannot guarantee that the information provided in the product specification is entirely accurate and error-free. SAILFERO shall not be held responsible for any losses or damages resulting from the use or reliance on any information in these product specifications. SAILFERO reserves the right to revise or update the product specification and the products at any time without prior notice, and the user's continued use of the product specification is considered an acceptance of these revisions and updates. Prior to purchasing and using the product, users should verify the above information with SAILFERO to ensure that the product specification is the most current, effective, and complete. If users are particularly concerned about product parameters, please consult SAILFERO in detail or request relevant product test reports. Any data not explicitly mentioned in the product specification shall be subject to separate agreement.

Users are advised to pay attention to the parameter limit values specified in the product specification and maintain a certain margin in design or application to ensure that the product does not exceed the parameter limit values defined in the product specification. This precaution should be taken to avoid exceeding one or more of the limit values, which may result in permanent irreversible damage to the product, ultimately affecting the quality and reliability of the system or equipment.

The design of the product is intended to meet civilian needs and is not guaranteed for use in harsh environments or precision equipment. It is not recommended for use in systems or equipment such as medical devices, aircraft, nuclear power, and similar systems, where failures in these systems or equipment could reasonably be expected to result in personal injury. SAILFERO shall assume no responsibility for any consequences resulting from such usage.

Users should also comply with relevant laws, regulations, policies, and standards when using the product specification. Users are responsible for the risks and liabilities arising from the use of the product specification and must ensure that it is not used for illegal purposes. Additionally, users should respect the intellectual property rights related to the product specification and refrain from infringing upon any third-party legal rights. SAILFERO shall assume no responsibility for any disputes or controversies arising from the above-mentioned issues in any form.